


**LEADING EDGE WORK - 15' RULE**

At 15' from the leading edge or greater, the use of a warning line can be used in place of conventional fall protection due to feasibility limitations

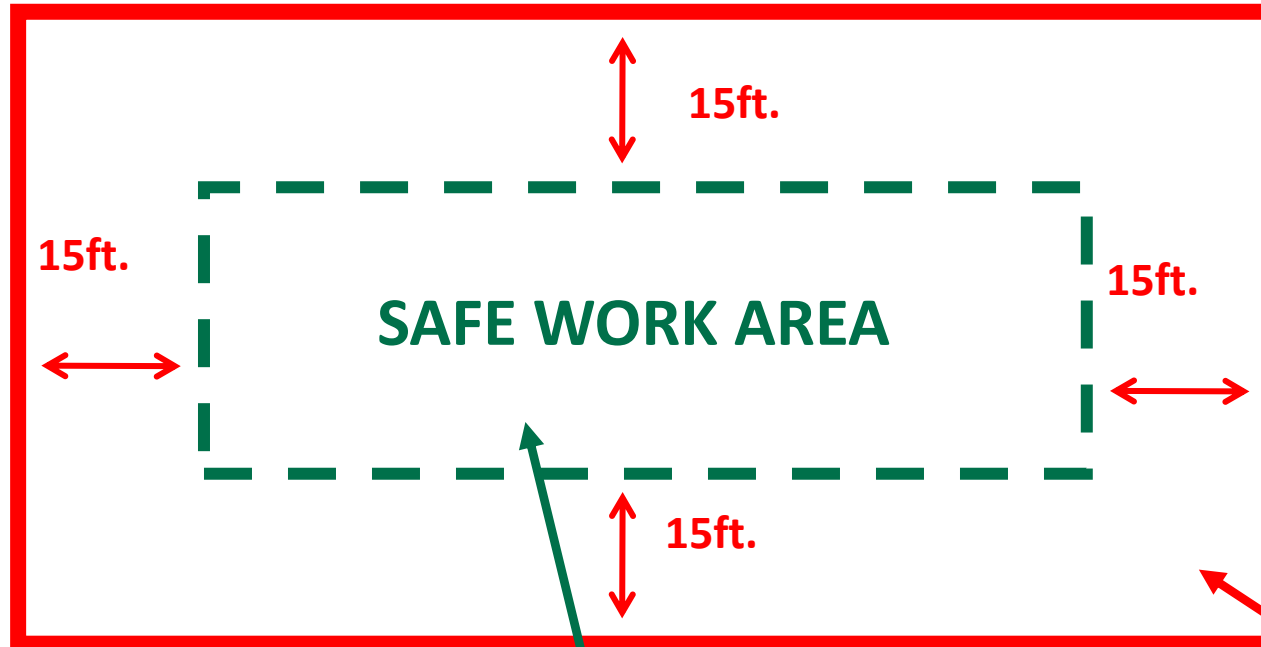

**SAFE WORK AREA**


- **MUST BE FLAGGED EVERY 6ft.**  
**\*(CAR FLAGGING)**
- **WARNING LINE MUST BE MAINTAINED BETWEEN 34in. & 39in. AND BE ABLE TO WITHSTAND 16lbs OF FORCE WITHOUT FALLING**

**LEADING EDGE**

**100% TIE OFF  
REQUIRED OUTSIDE  
THE SAFE WORK  
AREA.**

## Other Warning Line Rules

If roof access is only available outside the warning line, then an access path should be created out of warning lines to safely guide them to the working area. Once the worker is inside the warning line system, a means of closing off the access path where it joins the warning line system should be in place. Alternatively, the access path can be created in an L-shape. This prevents a worker from inadvertently entering the access path and falling off the edge.

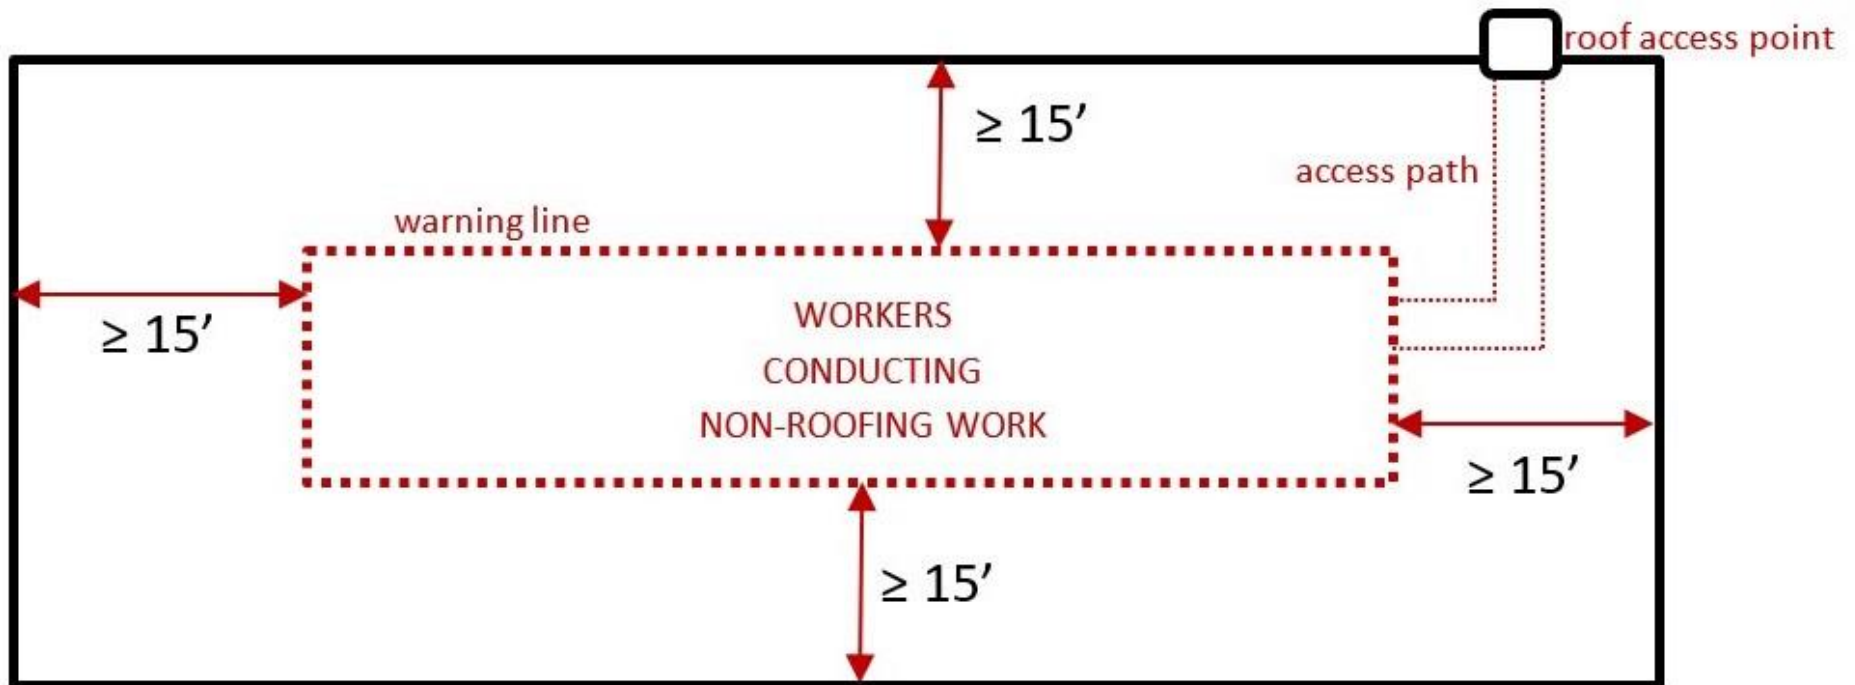

Note: Workers conducting “roof work” may use a warning line at 6’ or greater away from a leading edge